


# SMART DATA SHEET

## HP3 - HIGH PERFORMANCE CONICAL HALF KP LOW

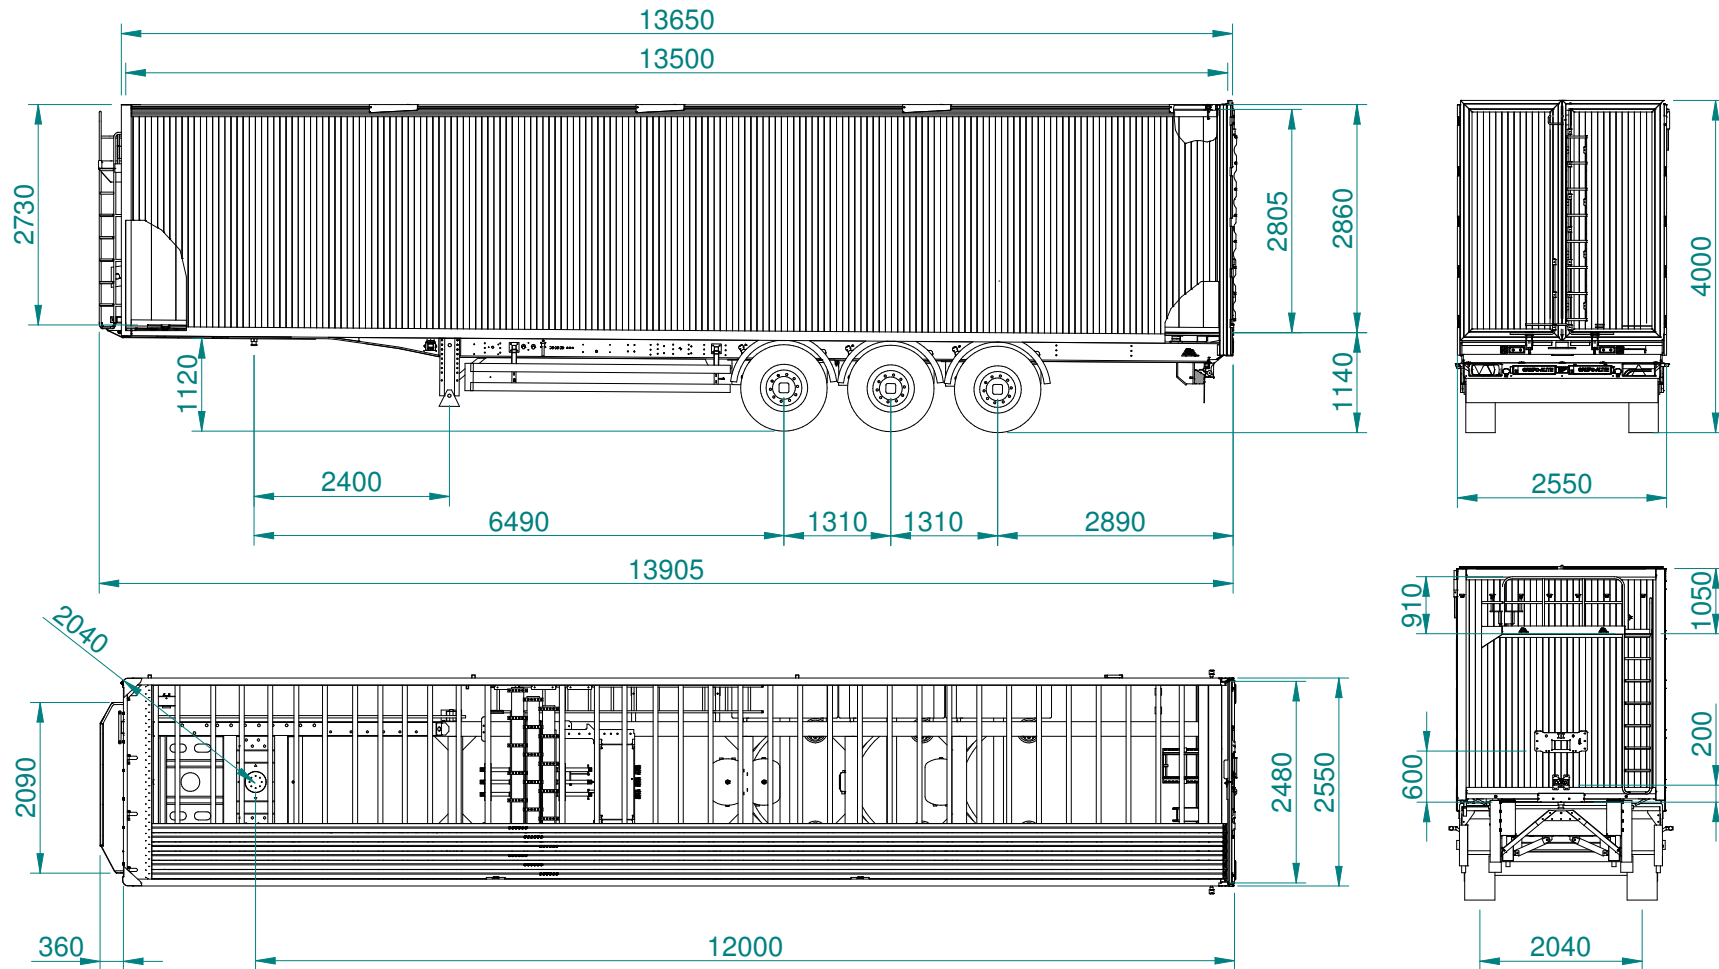

| Characteristic                  | Value              | Observations   |
|---------------------------------|--------------------|--|
| Useful volume (m <sup>3</sup> ) | 93,6m <sup>3</sup> | Useful volume. Interior dimensions: 13.500 x 2.480 x 2.730-2.860 mm (long x width x high). |
| Empty weight (kg)               | 7.480              | Vehicle weight. See equipment on next page.  |
| TPMM (kg)                       | 39.000             | Vehicle total. (Technically Permissible Maximum Mass).                                     |
| TPMM pivot (kg)                 | 12.000             | Standard pivot 2", class H50-X.  |
| TPMM axles 1-2-3 (kg)           | 9.000              | Tires 385/65 R22,5, rim offset.  |
| European Homologation TIPO      | S3NB               | e9*2007/46*0557*01.  |

## HP3-1 CHASSIS SEMITRAILER ALITE (TPMM 39.000 kg)

- HP3-1.1** Aluminium chassis with 250 mm frames in double T in AL6005 T6 extrusion in one piece.
- HP3-1.2** Fifth wheel locking design for a 1.120 mm height from the floor. Range of run: 1.100 a 1.150 mm. Technically Permissible Maximum Mass: TPMM = 12.000 kg. Bolt-on fifth wheel plate in 8 mm thick S355 JR steel. 8 mm thick coupling pivot bridge crosspieces in AL5754 H111 folded sheet metal.
- HP3-1.3** Three 3 axles BPW ECOPLUS III with disc brake. Technically Permissible Maximum Mass: TPMM: 1<sup>o</sup>-2<sup>o</sup>-3<sup>o</sup> = 9.000 kg per axle.
- Distance King Pin - 1st axis: 6.490 mm
  - Distance 1st - 2nd axle: 1.310 mm
  - Distance 2nd - 3rd axle: 1.310 mm
  - Rear overhang: 2.890 mm
- HP3-1.4** BPW ECO AIRCOMPACT integral pneumatic suspension (ACBM L5 FH 310-370 mm).
- HP3-1.5** Third axle elevator with automatic control. Up and down control by the EBS ECU.
- HP3-1.6** Six (6) CHT3 CONTINENTAL tyres, dimensions 385/65 R22,5"
- HP3-1.7** Six (6) painted steel rims offset by pumping B=120 mm.
- HP3-1.8** One (1) screw-type spare wheel support without wheel.
- HP3-1.9** HALDEX GEN3 + EBS 4S/2M pneumatic brake system with mechanical suspension:
- InfoCentre 2 panel to control suspension and brake parameters. Scale function among others.
  - COLAS leveling valve:
    - o Dead man function, RoRo function (Roll-on, Roll-off).
    - o RTR function for automatic repositioning of ride height when starting the vehicle movement.
  - TrCM (Trailer Control Module) parking valve.
  - Six (6) brake pad wear sensors.
  - Overflow valve for suspension circuit.
  - Coupling heads with filter and pressure tap according to ISO 1728.
  - ISO 7638 connector. Power supply by additional stoplight.
- HP3-1.10** Three (3) 60 L aluminium tanks, diameter d396 x 592 mm with supports. Two (2) brake tanks + one (1) suspension tank.
- HP3-1.11** Two (2) BPW 2 speed mechanical type painted steel support fee

**HP3-1.12** Fixed anti-underrun device in anodized aluminium ALA-ALU according to Regulation 58.

**HP3-1.13** Six (6) integral mudguards in polypropylene with anti-splash system valances according to Regulation 109.

**HP3-1.14** Drop side lateral under-run protections with anodised aluminium bars.

**HP3-1.15** One (1) 1.000 mm tools drawer in PVC. One (1) water tank with soap dispenser in PVC. Two (2) empty drawers of fire extinguishers in PVC, on configuration A1, A2.

**POSSIBLE MOUNTING CONFIGURATIONS:**

**A1 AND B1 FOR DRIVING ON THE RIGHT / A2 AND B2 FOR DRIVING ON THE LEFT:**

**A1 Right driving vehicle WITHOUT hydraulic accessories**

**LEFT SIDE IN RUNNING ORDER:**

- o Water tank.
- o Suspension lever.
- o Brake control.
- o Moving floor control panel.
- o Two (2) extinguisher drawers in vertical position mounted in the central part and integrated in the cyclist.
- o Pole for tarpaulin integrated in the cyclist.

**RIGHT SIDE IN RUNNING ORDER:**

- o Lever for operating the legs.
- o Spare wheel holder.
- o One (1) tool drawer in the central rear part integrated in the cyclist life-saving.
- o Ladder with 12-14 aluminium rungs with support for cyclists.

**NOTES:**

1. When a 2nd tool drawer is mounted, it will be mounted at the rear on the left side on the overhang.
2. When a 2nd spare wheel carrier is mounted, it will be mounted in the central part on the left side, moving the two (2) extinguisher drawers.

**A2 Left driving vehicle WITHOUT hydraulic accessories**

**LEFT SIDE IN RUNNING ORDER:**

- o Lever for operating the legs.
- o Spare wheel holder.
- o One (1) tool drawer in the central rear part integrated in the cyclist life-saving.
- o Ladder with 12-14 aluminium rungs with support for cyclists.

**RIGHT SIDE IN RUNNING ORDER:**

- o Water tank.
- o Suspension lever.
- o Brake control.
- o Moving floor control panel.
- o Two (2) extinguisher drawers in vertical position mounted in the central part and integrated in the cyclist.
- o Pole for tarpaulin integrated in the cyclist.

**NOTES:**

1. When a 2nd tool drawer is mounted, it will be mounted at the rear on the right side on the overhang.
2. When a 2nd spare wheel carrier is mounted, it will be mounted in the central part on the right side, moving the two (2) extinguisher drawers.

**HP3-1.16** Lightening mechanism and light signals according to the Regulation 48 with Aspöck Europoint III rear lights Led markers. Folding protections for the lights in aluminium integrated in the rear of the vehicle.

**HP3-1.17** Chassis finished in non-anodised raw aluminium.

## **HP3-2 OPEN BODYWORK WITH INTEGRAL FIXED SIDES IN ALUMINIUM (93,6 m<sup>3</sup>)**

**HP3-2.1** Integral aluminium fixed sides open bodywork construction. Outer dimensions: 13.650 mm (length) x 2.550 mm (width) and 2.730 / 2.860 mm of usable inner height. Fully usable volume of 93,6 m<sup>3</sup>. Maximum ground height 4.000 mm for fifth wheel locking at 1.120 mm.

**HP3-2.2** AL6005 T6 Alloy aluminium panels with tongue-and-groove joint system boards. 300 x 30 x 2,25 / 1,85 (width x thickness x inner / outer thickness).

**HP3-2.3** Twenty-one (21) aluminium blades (112 mm) ALITE HEAVY DUTY hydraulic mobile floor system in aluminium AL6082 T6 (standard 6 mm + 1,5 mm blades). Mounting of 735 slides per unit on aluminium tube 25,4 x 25,4 x 2 mm.

**HP3-2.4** Lower band of curved type reinforced in aluminium AL6082 T6.

**HP3-2.5** Upper profile for closing handrail with integrated rail reinforced in AL6082 T6.

**HP3-2.6** Sliding sweeper tarpaulin set up on a bar with two stainless steel pulleys with dismantable bearing.

**HP3-2.7** Full height fixed front in aluminium with catwalk at 1,050 mm from the handrail and with maximum dimensions according to Regulations. Access ladder on the left side in running order. 910 mm high railing.

**HP3-2.8** Rear door with 2 parts without upper crossbar and with closing system with central espagnolette with double fastening. Open bodywork closing ironworks integrated in the pillars profiles made of AISI 304b stainless steel. Aluminium ladder on the right door side.

**HP3-2.9** Additional pneumatic closing system for rear doors with manual activation with button in the chassis.

**HP3-2.10** System 5 arches in black anodized ALITE extrusion aluminium tube of section 60x50 mm, quality AL6082 T6. Arches folding towards the top and rotating laterally. Standard version:

- First (1st): straight without detachable type point with pin.
- Second (2nd), third (3rd) and fourth (4th): 50 mm high centre point, rotating and folding upwards.
- Fifth (5th): straight without point, rotating and folding upwards.

**HP3-2.11**

Tin opener roll up 680 g/m<sup>2</sup> canvas top, with fall of 600 mm on the left side in running order and fixed on the right side. Colour according to RAL guide. Four (4) tensing ratchets on the left side and two (2) on the right side in running order for the tarpaulin belts. Four (4) ALITE aluminium swing-away spring-loaded bayonets mounted on the right side in running order. Two (2) inner reinforcing tubes in the centre at 550 mm between them, 3/4" galvanized iron pipe.

| COLOUR   | RAL  | RAL  | RAL  | RAL  | RAL  | RAL  | OTHER      |
|----------|------|------|------|------|------|------|------------|
| BLUE     | 5012 | 5015 | 5010 | 5002 | 5003 | 5013 | EUROPA 941 |
| YELLOW   | 1013 | 1015 | 1014 | 1018 | 1021 | 1003 |            |
| GREEN    | 6005 | 6028 | 6026 | 6018 |      |      |            |
| GRAY     | 7035 | 7038 | 7037 |      |      |      |            |
| ORANGE   | 2008 | 2004 |      |      |      |      |            |
| RED      | 3020 | 3002 |      |      |      |      |            |
| WHITE    | 9010 | 9016 |      |      |      |      |            |
| BROWN    | 8017 |      |      |      |      |      |            |
| ALUMINUM | 9006 |      |      |      |      |      |            |
| BLACK    | 9005 |      |      |      |      |      |            |

**HP3-2.12**

Two (2) pulling rings at the rear

**HP3-2.13**

Electrical and pneumatic connections 600 mm from the coupling pivot plate. Watertight box with electrical connectors ISO 3731 (24 N) + ISO 1185 (24 s) + ISO 12098 (15 P) and red and yellow ISO 1728 tires.

**HP3-2.14**

Hydraulic connections 250 mm from the coupling pivot plate with aluminium safety valve against wrong connections ALITE AL-BL101. Rigid pressure tube DIN 2391 with sections 22x2,5 mm in pressure (WP 250 bar) and 28x2,0 mm in return (WP 200 bar).

**HP3-2.15**

One (1) aluminium ladder with 12 steps with holder on the under-run protections.

**HP3-2.16**

Drawer finished in non-anodised raw aluminium.